

higher education & training

Department:
Higher Education and Training
REPUBLIC OF SOUTH AFRICA

T570(E)(J30)T
AUGUST EXAMINATION
NATIONAL CERTIFICATE
ENGINEERING SCIENCE N3

(15070413)

30 July 2014 (Y-Paper)
13:00–16:00

REQUIREMENTS: Properties of water and steam (BOE-173)

Calculators may be used.

This question paper consists of 8 pages, 2 formula sheets and 1 information sheet.

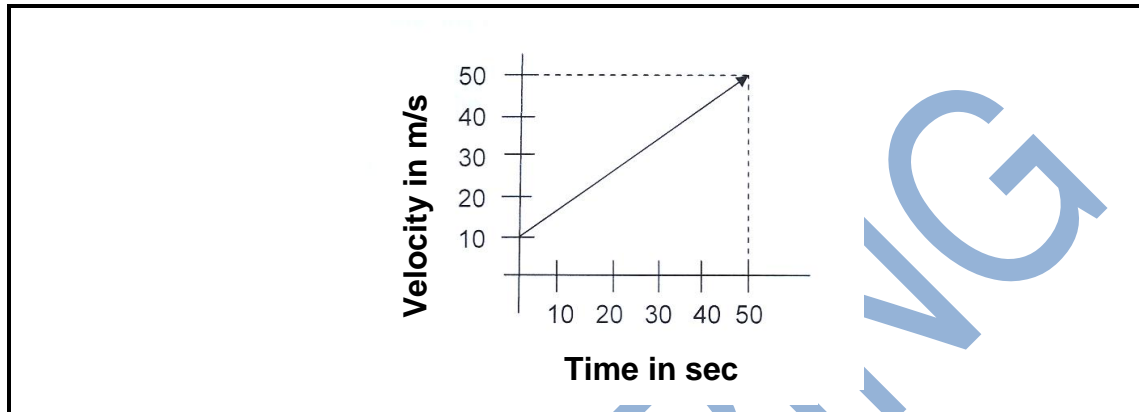
DEPARTMENT OF HIGHER EDUCATION AND TRAINING
REPUBLIC OF SOUTH AFRICA
NATIONAL CERTIFICATE
ENGINEERING SCIENCE N3
TIME: 3 HOURS
MARKS: 100

INSTRUCTIONS AND INFORMATION

1. Answer ALL the questions.
 2. Read ALL the questions carefully.
 3. Number the answers according to the numbering system used in this question paper.
 4. All the calculations should consist of at least the THREE steps:
 - 4.1 The formula used or manipulation thereof
 - 4.2 Substitution of the given data in the formula
 - 4.3 The answer with the correct SI unit
 5. Drawing instruments must be used for all drawings/diagrams.
 6. ALL drawings/diagrams must be fully labelled.
 7. The constant values, as they appear on the attached information sheet, must be used wherever possible.
 8. Keep subsections of questions together.
 9. Start each question on a NEW page.
 10. Use $g = 9,8 \text{ m/s}^2$
 11. Answers must be rounded off to THREE decimal places.
 12. Write neatly and legibly.
-

QUESTION 1: MOTION, POWER AND ENERGY

- 1.1 FIGURE 1 below shows a graph of velocity against time. Use the graph to calculate the following:

**FIGURE 1**

- 1.1.1 The acceleration (2)
- 1.1.2 The initial velocity (1)
- 1.1.3 The total displacement (2)
- 1.2 A tower is 24 m high. A stone is projected upwards from the tower with an initial velocity of 24, 5 m/s.
- Calculate how long it would take for the stone to reach the ground at the foot of the tower. (4)
- 1.3 Describe the following terms: (3)
- 1.3.1 force (2)
- 1.3.2 mass. (1)
- 1.4 A cannon with a mass of 10 tons fires a bullet horizontally with a mass of 50 kg. The velocity of the bullet when it leaves the barrel of the cannon is 800 m/s.
- Calculate the recoil velocity of the cannon. (3)

[15]

QUESTION 2: MOMENTS

2.1 Describe what you understand by *shear force*. (2)

2.2 FIGURE 2 below shows the shear-force diagram of a horizontal beam of a uniform cross section being supported at two positions.

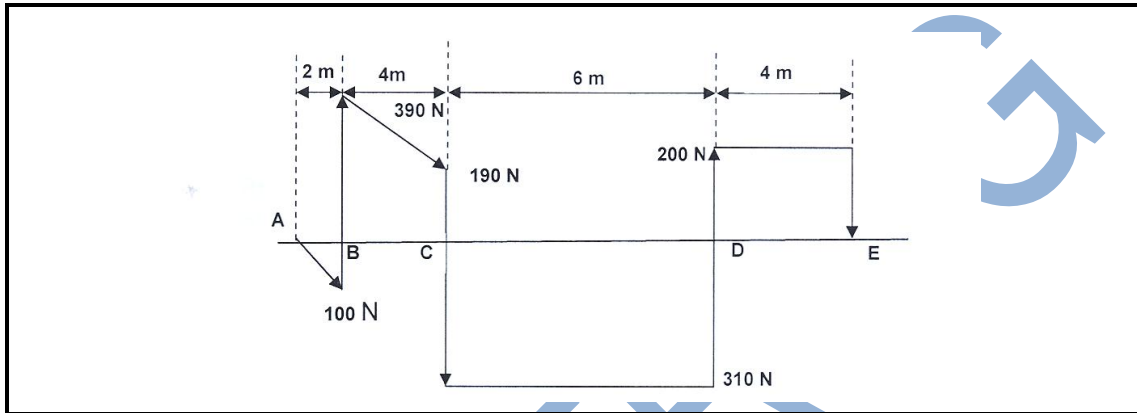


FIGURE 2

2.2.1 At which TWO positions is the beam supported and what is the magnitude of each support? (2)

2.2.2 Calculate the magnitude of the distributed load per meter length. (2)

2.3 FIGURE 3 below shows a light horizontal beam ABCD with a uniform cross section loaded as shown. The magnitude of support A is 32,222 kN.

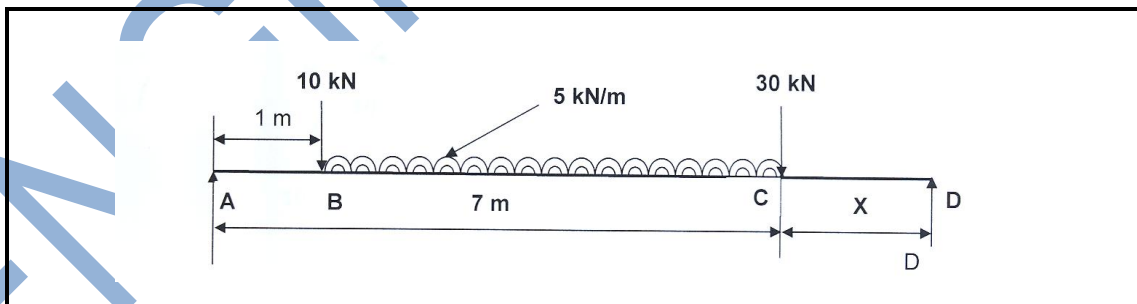


FIGURE 3

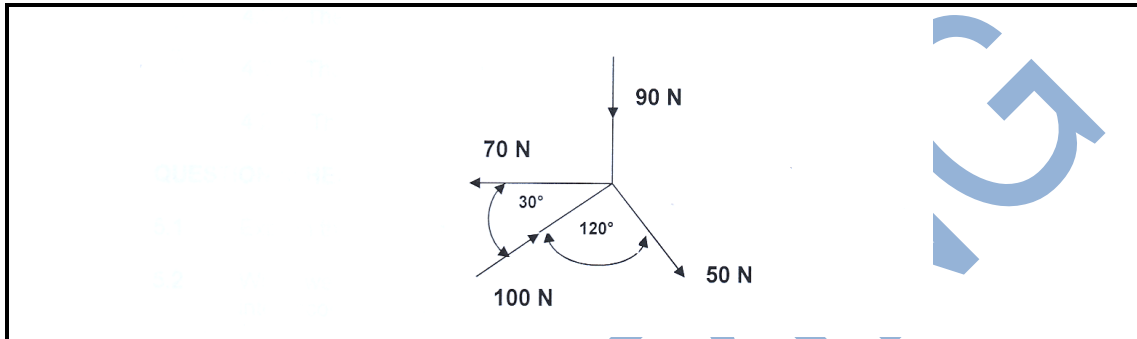
2.3.1 Calculate the magnitude of support D by using Newton's third law. (4)

2.3.2 Calculate the distance X by taking moments about support D. (4)

[14]

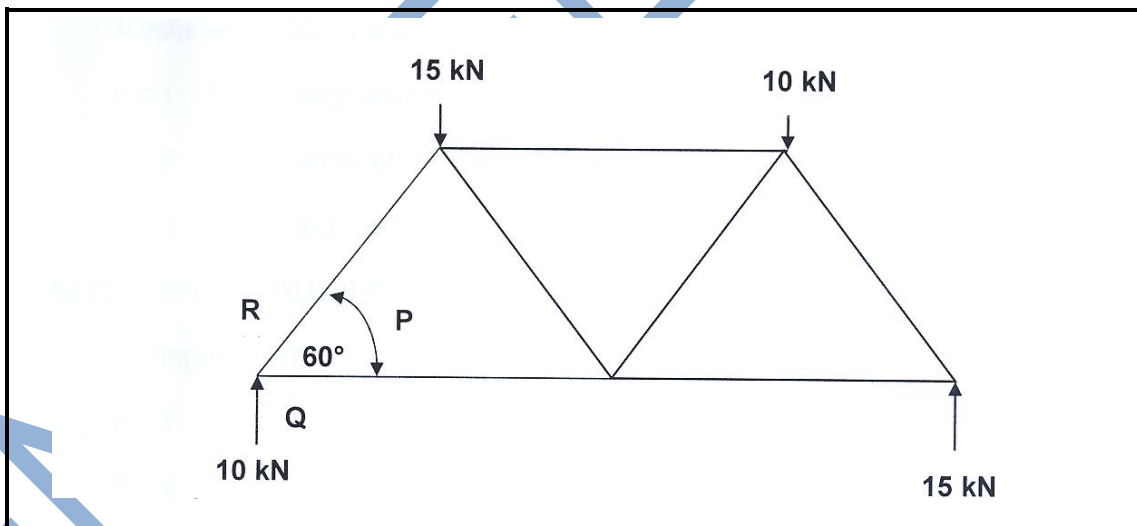
QUESTION 3: FORCES

- 3.1 Define the *triangle of forces*. (2)
- 3.2 Determine analytically the magnitude and direction of the resultant of the system of forces shown in FIGURE 4 below.

**FIGURE 4**

(8)

- 3.3 FIGURE 5 below shows a structure. Determine graphically or calculate the magnitude and nature of the forces in members PQ and PR.

**FIGURE 5**(4)
[14]

QUESTION 4: FRICTION

4.1 List FOUR advantages of friction. (4)

4.2 A block with a mass of 0,75 ton rests on an inclined plane at an angle of 20° to the horizontal plane.

If the friction force is 2 000 N, determine the following:

4.2.1 The component of the weight of the block parallel with the plane. (2)

4.2.2 The component of the weight of the block perpendicular to the plane. (2)

4.2.3 The smallest force required to pull the block upwards along the plane. (2)

4.2.4 The coefficient of friction. (2)

[12]

QUESTION 5: HEAT

5.1 Explain the term *heat value of a fuel*. (2)

5.2 Name THREE of the factors we have to take into account when we want to heat or cool something. (3)

5.3 5 kg of steel is immersed in water at 20°C .
What mass of water is required if the final temperature is 40°C ? (5)

5.4 A volume of 250 l of water is heated from 280°C to 360°C by burning coal.

Calculate the following:

5.4.1 The change in temperature of the water (1)

5.4.2 The quantity of heat required (2)

5.4.3 The quantity of coal required (2)

[15]

QUESTION 6: HYDRAULICS

- 6.1 Explain the following terms:
- Absolute pressure
 - Gauge pressure
- (3)
- 6.2 The ram of a hydraulic jack is 100 mm in diameter. The diameter and stroke of the plunger are 20 mm and 50 mm respectively. Determine the following:
- 6.2.1 The force that must be applied to the lever to lift a load of 2,3 tons if the efficiency is 85%. (3)
- 6.2.2 The number of strokes of the lever to lift the load 126 mm. (3)
- 6.3 The following data were given: An inside diameter of the water pipe is 50 mm and an effective head is 30 m.
- Calculate the work done. (3)
- [12]

QUESTION 7: ELECTRICITY

- 7.1 Four cells each having an emf of 1,5 V and an internal resistance of 0,5 Ω are connected in series. Two resistors of 6 Ω and 8 Ω respectively are connected in parallel and then across the terminals of the battery.
- Calculate the following:
- 7.1.1 The current through each cell (3)
- 7.1.2 The terminal voltage of the battery (2)
- 7.1.3 The current through each resistor (2)
- 7.1.4 The internal voltage drop (2)
- 7.2 Define the term *ampere*. (2)
- 7.3 Define the term *potential difference*. (1)
- [12]

QUESTION 8: CHEMISTRY

8.1 Name THREE known metals that are listed on the periodic chart. (3)

8.2 Complete the following sentences by filling in the missing word(s). Write only the word(s) next to the question number (8.2.1–8.2.3) in the ANSWER BOOK.

Some researchers use the following terms: dry corrosion process instead of (8.2.1) ... and wet corrosion process instead of (8.2.2) ...

Oxidation of a metal produces a (8.2.3) ... (3)
[6]

TOTAL: 100

ENGINEERING SCIENCE N3**FORMULA SHEET**

All the formulae needed are not necessarily included.
Any applicable formula may also be used.

$$W = F \cdot s$$

$$W = \rho \cdot V$$

$$P = \frac{W}{t}$$

$$\eta = \frac{\text{Uitset/Output}}{\text{Inset/Input}} 100\%$$

$$F = m \cdot a$$

$$\mu = \frac{F_{\mu}}{N_R}$$

$$\mu = \tan \Phi$$

$$N_R = F_C \pm F_T \sin \alpha \dots a = 0$$

$$F_S = w \sin \theta$$

$$F_C = w \cos \theta$$

$$F_T \cos \alpha = F_{\mu} \pm F_S \dots a = 0$$

$$F_e = T_1 - T_2$$

$$\frac{T_1}{T_2} = \text{tension ratio}$$

$$P = F_e \cdot v$$

$$v = \pi \cdot d \cdot n \dots n = \frac{N}{60}$$

$$W_{\mu} = F_{\mu} \cdot s$$

$$\Delta E_p = m \cdot g \cdot \Delta h$$

$$\Delta E_K = \frac{1}{2} \cdot m \cdot \Delta v^2$$

$$Q = I^2 \cdot R \cdot t$$

$$m = I \cdot z \cdot t$$

$$m_1 \cdot u_1 \pm m_2 \cdot u_2 = m_1 \cdot v_1 \pm m_2 \cdot v_2$$

$$D_e = (D + t)$$

$$h_{nat/wet} = h_f + x \cdot h_{fg}$$

$$P = 2 \cdot \pi \cdot T \cdot n \dots T = F \cdot r$$

$$P = \frac{F_{RAM}}{A_{RAM}} = \frac{F_{PL}}{A_{PL}} \dots A = \frac{\pi D^2}{4}$$

$$V_{RAM} = V_{PL} \times n$$

$$A_{RAM} \cdot H_{RAM} = A_{PL} \cdot L_{PL}$$

$$F_X = F \cos \theta$$

$$F_Y = F \sin \theta$$

$$\Sigma F_X = F_1 \cos \theta_1 + \dots + F_n \cos \theta_n$$

$$\Sigma F_Y = F_1 \sin \theta_1 + \dots + F_n \sin \theta_n$$

$$R = \sqrt{\Sigma F_X^2 + \Sigma F_Y^2}$$

$$\tan \varphi = \frac{\Sigma F_Y}{\Sigma F_X}$$

$$Q = m \cdot c \cdot \Delta t \dots t_F = t_0 \pm \Delta t$$

$$m \cdot w w = Q = m \cdot h v$$

$$P = \frac{Q}{t}$$

$$\Delta L = L_0 \cdot \alpha \cdot \Delta t \dots L_f = L_0 \pm \Delta L$$

$$\Delta A = A_0 \cdot \beta \cdot \Delta t \dots A_f = A_0 \pm \Delta A$$

$$2 \cdot a \cdot s = v^2 - u^2$$

$$s = u \cdot t + \frac{1}{2} \cdot a \cdot t^2$$

$$v = u + a \cdot t$$

$$\frac{V_P}{V_S} = \frac{N_P}{N_S} = \frac{I_S}{I_P}$$

$$M = F \cdot \perp s$$

$$\Sigma CWM = \Sigma ACWM$$

$$P_{ABS} = P_{ATM} + P_{MET}$$

$$P = \delta \times g \times h$$

$$\frac{1}{R_{PAR}} = \frac{1}{R_1} + \dots + \frac{1}{R_n}$$

$$R_{SER} = R_1 + \dots + R_n$$

$$V_1 - V_2 = -e(U_1 - U_2)$$

$$V = I \times R$$

ENGINEERING

INFORMATION SHEET**PHYSICAL CONSTANTS**

| QUANTITY | CONSTANTS KONSTANTE | HOEVEELHEID |
|--|---------------------------|--|
| Atmospheric pressure | 101,3 kPa | Atmosferiese druk |
| Density of copper | 8 900 kg/m ³ | Digtheid van koper |
| Density of aluminium | 2 770 kg/m ³ | Digtheid van aluminium |
| Density of gold | 19 000 kg/m ³ | Digtheid van goud |
| Density of alcohol (ethyl) | 790 kg/m ³ | Digtheid van alcohol (etiel) |
| Density of mercury | 13 600 kg/m ³ | Digtheid van kwik |
| Density of platinum | 21 500 kg/m ³ | Digtheid van platina |
| Density of water | 1 000 kg/m ³ | Digtheid van water |
| Density of mineral oil | 920 kg/m ³ | Digtheid van minerale olie |
| Density of air | 1,05 kg/m ³ | Digtheid van lug |
| Electrochemical equivalent of silver | 1,118 mg/C | Elektrochemiese ekwivalent van silwer |
| Electrochemical equivalent of copper | 0,329 mg/C | Elektrochemiese ekwivalent van koper |
| Gravitational acceleration | 9,8 m/s ² | Swaartekragversnelling |
| Heat value of coal | 30 MJ/kg | Warmtewaarde van steenkool |
| Heat value of anthracite | 35 MJ/kg | Warmtewaarde van antrasiet |
| Heat value of petrol | 45 MJ/kg | Warmtewaarde van petrol |
| Heat value of hydrogen | 140 MJ/kg | Warmtewaarde van waterstof |
| Linear coefficient of expansion of copper | 17 × 10 ⁻⁶ /°C | Lineêre uitsettingskoëffisiënt van koper |
| Linear coefficient of expansion of aluminium | 23 × 10 ⁻⁶ /°C | Lineêre uitsettingskoëffisiënt van aluminium |
| Linear coefficient of expansion of steel | 12 × 10 ⁻⁶ /°C | Lineêre uitsettingskoëffisiënt van staal |
| Linear coefficient of expansion of lead | 54 × 10 ⁻⁶ /°C | Lineêre uitsettingskoëffisiënt van lood |
| Specific heat capacity of steam | 2 100 J/kg.°C | Spesifieke warmtekapasiteit van stoom |
| Specific heat capacity of water | 4 187 J/kg.°C | Spesifieke warmtekapasiteit van water |
| Specific heat capacity of aluminium | 900 J/kg.°C | Spesifieke warmtekapasiteit van aluminium |
| Specific heat capacity of oil | 2 000 J/kg.°C | Spesifieke warmtekapasiteit van olie |
| Specific heat capacity of steel | 500 J/kg.°C | Spesifieke warmtekapasiteit van staal |
| Specific heat capacity of copper | 390 J/kg.°C | Spesifieke warmtekapasiteit van koper |